

Description

Transducer for short range reading and writing of RFID tags including GEN2 tags. Applications include printers, automation equipment, etc.

ROHS Compliant.

Specifications


Electrical

Frequency Band	860-960 MHz
VSWR	<2.0:1
Polarization	Linear
Power	1W

Mechanical



Weight	1 oz
Dimensions	H 1.00",W 0.13",L 4.00"
Finish	Solder Screen
Connector	12.5" Pendant Cable

VSWR

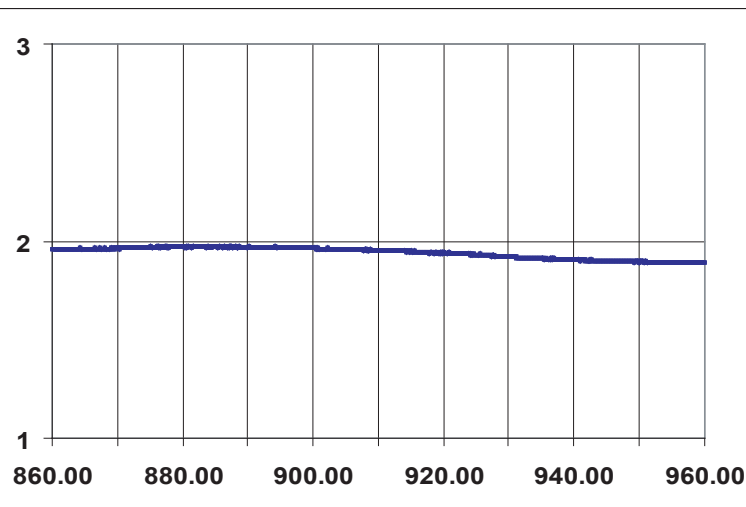

Frequency MHz

Physical Details

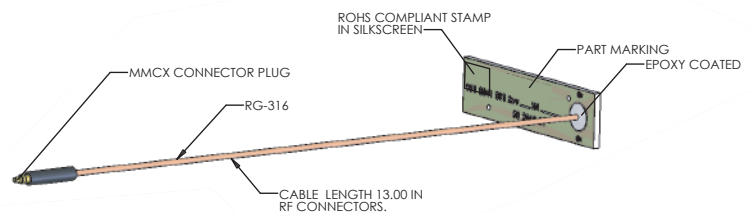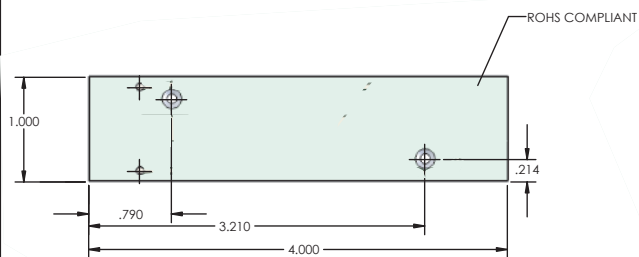

Custom Antenna Design, Manufacturing, and Testing