


RFD-8696

RFID Transducer

Transducer for short range reading and writing of RFID tags including GEN2 tags. Applications include printers, automation equipment, etc.

ROHS Compliant.

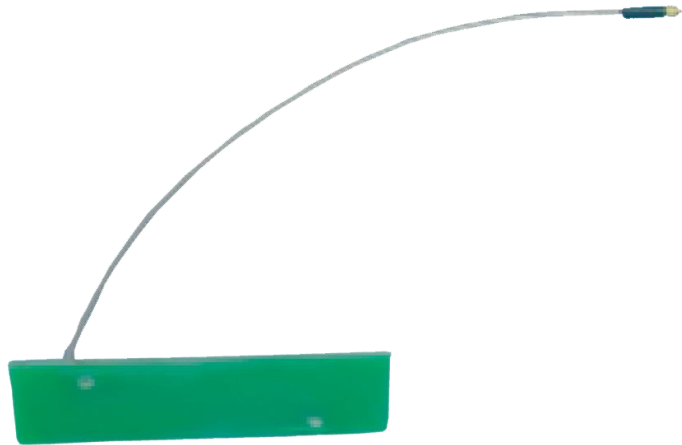

Specifications

Electrical

Frequency Band	860-960 MHz
VSWR	< 2.0 : 1
Polarization	Linear
Power	1W
Connector	12.5" Pendant Cable

Mechanical

Weight	1 oz
Dimensions	4.00" Length x 0.13" Width x 1.00" Height
Finish	Solder Screen
Shock	MIL-STD-810, 20G